




## EN 1092-1 TIPO 11B PN160 RF Collarino

Flange a collarino con raccordo conico saldato alla tubazione, progettate per garantire elevata resistenza meccanica e ottima distribuzione delle sollecitazioni.

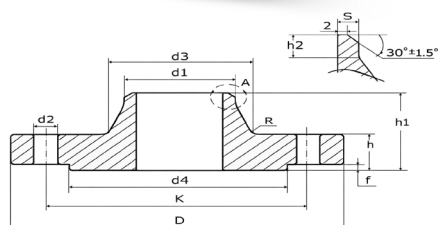

| DN  | d1    | D   | h  | k   | h1  | d3  | s     | r  | h2 | d4  | f | n. of<br>drills | thread | d2 | kg     |
|-----|-------|-----|----|-----|-----|-----|-------|----|----|-----|---|-----------------|--------|----|--------|
| 15  | 21,3  | 105 | 20 | 75  | 45  | 34  | 2,00  | 4  | 6  | 45  | 2 | 4               | M12    | 14 | 1,20   |
| 25  | 33,7  | 140 | 24 | 100 | 58  | 52  | 2,90  | 4  | 8  | 68  | 2 | 4               | M16    | 18 | 2,64   |
| 40  | 48,3  | 170 | 28 | 125 | 64  | 70  | 3,60  | 6  | 10 | 88  | 3 | 4               | M20    | 22 | 4,42   |
| 50  | 60,3  | 195 | 30 | 145 | 75  | 90  | 4,00  | 6  | 10 | 102 | 3 | 4               | M24    | 26 | 6,38   |
| 65  | 76,1  | 220 | 34 | 170 | 82  | 108 | 5,00  | 6  | 12 | 122 | 3 | 8               | M24    | 26 | 8,75   |
| 80  | 88,9  | 230 | 36 | 180 | 86  | 120 | 6,30  | 8  | 12 | 138 | 3 | 8               | M24    | 26 | 10,30  |
| 100 | 114,3 | 265 | 40 | 210 | 100 | 150 | 8,00  | 8  | 12 | 162 | 3 | 8               | M27    | 30 | 15,30  |
| 125 | 139,7 | 315 | 44 | 250 | 115 | 180 | 10,00 | 8  | 14 | 188 | 3 | 8               | M30    | 33 | 24,40  |
| 150 | 168,3 | 355 | 50 | 290 | 128 | 210 | 12,50 | 10 | 14 | 218 | 3 | 12              | M30    | 33 | 34,40  |
| 200 | 219,1 | 430 | 60 | 360 | 140 | 278 | 16,00 | 10 | 16 | 285 | 3 | 12              | M33    | 36 | 60,70  |
| 250 | 273,0 | 515 | 68 | 430 | 155 | 340 | 20,00 | 12 | 18 | 345 | 3 | 12              | M39    | 42 | 97,60  |
| 300 | 323,9 | 585 | 78 | 500 | 175 | 400 | 22,20 | 12 | 18 | 410 | 4 | 16              | M39    | 42 | 140,00 |