




EN 1092-1 TIPO 11B PN40 SCH40 RF Collarino

Flange a collarino con raccordo conico saldato alla tubazione, progettate per garantire elevata resistenza meccanica e ottima distribuzione delle sollecitazioni.

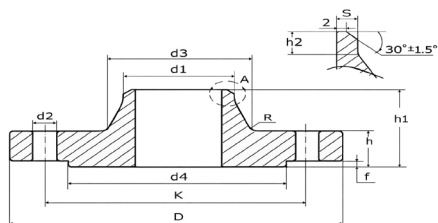

DN	d1	D	h	k	h1	d3	s	r	h2	d4	f	holes	thread	d2
50	60,3	165	20	125	48	75	3,91	6	8	102	3	4	M16	18
65	73,0	185	22	145	52	90	5,16	6	10	122	3	8	M16	18
80	88,9	200	24	160	58	105	5,49	8	12	138	3	8	M16	18
100	114,3	235	24	190	65	134	6,02	8	12	162	3	8	M20	22
125	141,3	270	26	220	68	162	6,55	8	12	188	3	8	M24	26
150	168,3	300	28	250	75	192	7,11	10	12	218	3	8	M24	26
200	219,1	375	34	320	88	244	8,18	10	16	285	3	12	M27	30