




EN 1092-1 TIPO 11B PN63 RF Collarino

Flange a collarino con raccordo conico saldato alla tubazione, progettate per garantire elevata resistenza meccanica e ottima distribuzione delle sollecitazioni.

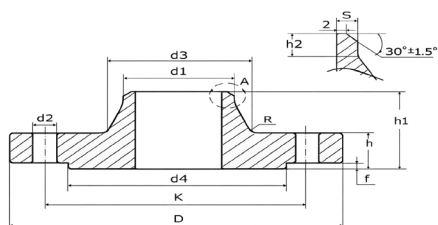

DN	d1	D	h	k	h1	d3	s	r	h2	d4	f	n. of drills	thread	d2	kg
15	21,3	105	20	75	45	34	2,00	4	6	45	2	4	M12	14	1,200
20	26,9	130	22	90	48	42	2,60	4	8	58	2	4	M16	18	2,020
25	33,7	140	24	100	58	52	2,60	4	8	68	2	4	M16	18	2,630
32	42,4	155	24	110	60	62	2,90	6	8	78	2	4	M20	22	3,200
40	48,3	170	26	125	62	70	2,90	6	10	88	3	4	M20	22	4,070
50	60,3	180	26	135	62	82	2,90	6	10	102	3	4	M20	22	4,510
65	76,1	205	26	160	68	98	3,20	6	12	122	3	8	M20	22	5,580
80	88,9	215	28	170	72	112	3,60	8	12	138	3	8	M20	22	6,680
100	114,3	250	30	200	78	138	4,00	8	12	162	3	8	M24	26	9,270
125	139,7	295	34	240	88	168	4,50	8	12	188	3	8	M27	30	14,500
150	168,3	345	36	280	95	202	5,60	10	12	218	3	8	M30	33	21,400
200	219,1	415	42	345	110	256	7,10	10	16	285	3	12	M33	36	34,100
250	273,0	470	46	400	125	316	8,80	12	18	345	3	12	M33	36	48,300
300	323,9	530	52	460	140	372	11,00	12	18	410	4	16	M33	36	67,500
350	355,6	600	56	525	150	420	12,50	12	20	465	4	16	M36	39	97,800
400	406,4	670	60	585	160	475	14,20	12	20	535	4	16	M39	42	129,000