


ANSI B16.5 Flanges

ZETAMEC
flange dal 1963



ANSI B16.5 300_{LBS} BLIND RF

ANSI blind flanges are used to close or isolate the end of a pipeline, valve, or pressure vessel. They also provide access for inspections, maintenance activities, and future system expansions.

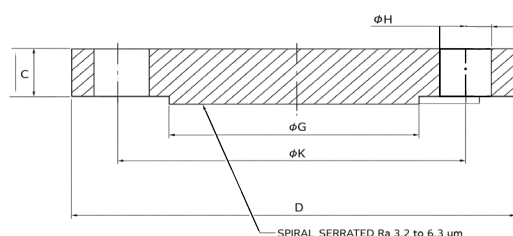

DN	D	C	G	k	n. of drills	H	kg
1/2"	95,20	14,20	35,00	66,50	4	15,70	0,66
3/4"	117,30	15,70	42,90	82,50	4	19,00	1,10
1"	123,90	17,50	50,80	88,90	4	19,00	1,40
1 1/4"	133,30	19,00	63,50	98,50	4	19,00	1,84
1 1/2"	155,40	20,60	73,10	114,30	4	22,30	2,73
2"	165,10	22,30	91,90	127,00	8	19,00	3,22
2 1/2"	190,50	25,40	104,60	149,30	8	22,30	4,92
3"	209,50	28,40	127,00	168,10	8	22,30	6,99
4"	254,00	31,70	157,20	200,10	8	22,30	11,70
5"	279,40	35,00	185,60	234,90	8	22,30	15,70
6"	317,50	36,50	215,90	269,70	12	22,30	21,50
8"	381,00	41,10	269,70	330,20	12	25,40	34,90