




ANSI B16.5 600LBS BLIND RF

ANSI blind flanges are used to close or isolate the end of a pipeline, valve, or pressure vessel. They also provide access for inspections, maintenance activities, and future system expansions.

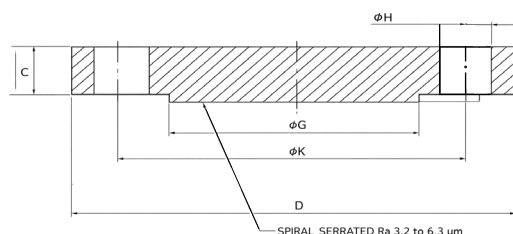

DN	D	C	G	k	n. of drills	H	kg
2"	165,00	25,40	91,90	127,00	8	19,05	4,30
4"	273,00	38,10	157,20	215,90	8	25,40	18,00
6"	356,00	47,80	215,90	292,10	12	28,60	35,50
8"	419,00	55,60	269,70	349,20	12	31,80	58,00
10"	508,00	63,50	323,80	431,80	16	34,90	98,00
12"	558,80	66,70	381,00	488,90	20	34,90	125,00
14"	603,20	69,80	412,70	527,00	20	38,10	151,00
16"	685,80	76,20	469,90	603,20	20	41,30	215,00
18"	742,90	82,50	533,40	654,00	20	44,40	287,00
20"	812,80	88,90	584,20	723,90	24	44,40	366,00
24"	939,80	101,60	692,10	838,20	24	50,80	532,00