



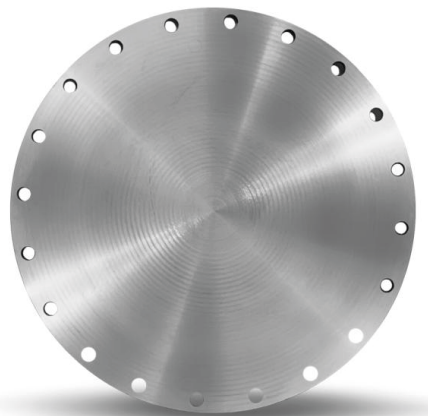

UNI 6093 PN16

- UNI 6093 PN16 flat flanges are designed for low-pressure industrial applications. They are suitable for simple flanged connections and ensure ease of installation.

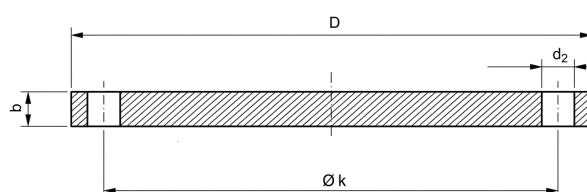

DN	k	D	b	d2	thread	N. of drills	kg
600	770	840	36	36	M33	20	150,781
700	840	910	38	36	M33	24	186,629
800	950	1025	38	39	M36	24	249,971
900	1050	1125	40	39	M36	28	316,54
1000	1170	1255	42	42	M39	28	413,659
1200	1390	1485	44	48	M45	32	611
1400	1590	1685	46	48	M45	36	821
1600	1820	1930	46	56	M52	40	970