



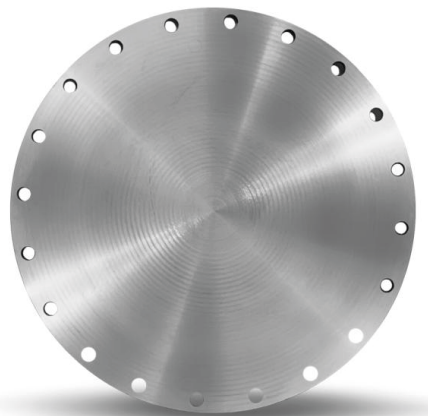

UNI 6094 PN25

- UNI 6094 PN25 flat flanges are designed for low-pressure industrial applications. They are suitable for simple flanged connections and ensure ease of installation.

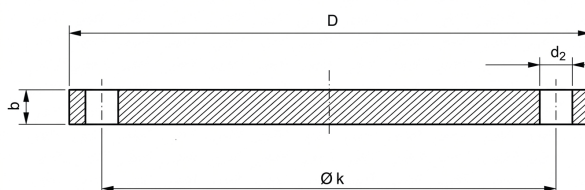

DN	k	D	b	d2	thread	N. of drills	kg
200	310	360	30	25	M22	12	22,572
250	370	425	32	30	M27	12	33,488
300	430	485	34	30	M27	16	46,266
350	490	555	38	33	M30	16	68,049
400	550	620	40	36	M33	16	89,64
450	600	670	42	36	M33	20	109,473
500	660	730	44	36	M33	20	137,462