




EN 1092-1 TYPE 11B PN160 RF Welding Neck

Weld neck flanges featuring a tapered hub welded directly to the pipe, designed to provide high mechanical strength and excellent stress distribution.

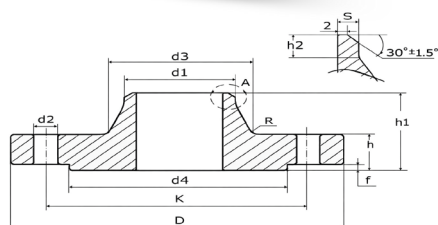

DN	d1	D	h	k	h1	d3	s	r	h2	d4	f	n. of drills	thread	d2	kg
15	21,3	105	20	75	45	34	2,00	4	6	45	2	4	M12	14	1,20
25	33,7	140	24	100	58	52	2,90	4	8	68	2	4	M16	18	2,64
40	48,3	170	28	125	64	70	3,60	6	10	88	3	4	M20	22	4,42
50	60,3	195	30	145	75	90	4,00	6	10	102	3	4	M24	26	6,38
65	76,1	220	34	170	82	108	5,00	6	12	122	3	8	M24	26	8,75
80	88,9	230	36	180	86	120	6,30	8	12	138	3	8	M24	26	10,30
100	114,3	265	40	210	100	150	8,00	8	12	162	3	8	M27	30	15,30
125	139,7	315	44	250	115	180	10,00	8	14	188	3	8	M30	33	24,40
150	168,3	355	50	290	128	210	12,50	10	14	218	3	12	M30	33	34,40
200	219,1	430	60	360	140	278	16,00	10	16	285	3	12	M33	36	60,70
250	273,0	515	68	430	155	340	20,00	12	18	345	3	12	M39	42	97,60
300	323,9	585	78	500	175	400	22,20	12	18	410	4	16	M39	42	140,00