




EN 1092-1 TYPE 11B PN16 SCH40 RF Welding Neck

Weld neck flanges featuring a tapered hub welded directly to the pipe, designed to provide high mechanical strength and excellent stress distribution.

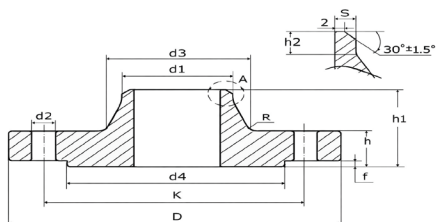

DN	d1	D	h	k	h1	d3	s	r	h2	d4	f	n. of drills	thread	d2
15	21,3	95	16	65	38	32	2,77	4	6	45	2	4	M12	14
20	26,7	105	18	75	40	40	2,87	4	6	58	2	4	M12	14
25	33,4	115	18	85	40	46	3,38	4	6	68	2	4	M12	14
32	42,4	140	18	100	42	56	3,56	6	6	78	2	4	M16	18
40	48,3	150	18	110	45	64	3,68	6	7	88	3	4	M16	18
50	60,3	165	18	125	45	74	3,91	6	8	102	3	4	M16	18
65	73,0	185	18	145	45	92	5,16	6	10	122	3	4	M16	18
80	88,9	200	20	160	50	105	5,49	6	10	138	3	8	M16	18
100	114,3	220	20	180	52	131	6,02	8	12	158	3	8	M16	18
125	141,3	250	22	210	55	156	6,55	8	12	188	3	8	M16	18
150	168,3	285	22	240	55	184	7,11	10	12	212	3	8	M20	22
200	219,1	340	24	295	62	235	8,18	10	16	268	3	12	M20	22