




EN 1092-1 TYPE 13B PN16 RF Threaded

Threaded flanges with an internally threaded bore, allowing connection to the pipe without welding.

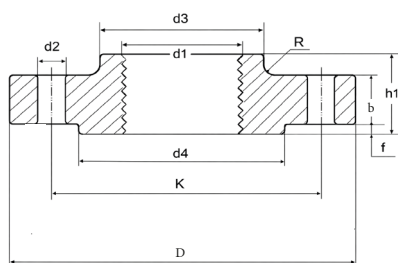

DN	ø	d1	d4	d3	f	k	D	b	d2	h1	R	Thread	n. of drills	kg
15	R 1/2"	21,3	45,0	35,0	2,0	65	95	16	14	22	4	M12	4	0,722
20	R 3/4"	26,9	58,0	45,0	2,0	75	105	18	14	26	4	M12	4	1,040
25	R 1"	33,7	68,0	52,0	2,0	85	115	18	14	28	4	M12	4	1,250
32	R 1-1/4"	42,4	78,0	60,0	2,0	100	140	18	18	30	6	M16	4	1,810
40	R 1-1/2"	48,3	88,0	70,0	3,0	110	150	18	18	32	6	M16	4	2,060
50	R 2"	60,3	102,0	84,0	3,0	125	165	18	18	28	6	M16	4	2,430
65	R 2-1/2"	76,1	122,0	104,0	3,0	145	185	18	18	32	6	M16	4	3,180
65	R 2-1/2"	76,1	122,0	104,0	3,0	145	185	18	18	32	6	M16	8	2,970
80	R 3"	88,9	138,0	118,0	3,0	160	200	20	18	34	6	M16	8	4,120
100	R 4"	114,3	158,0	140,0	3,0	180	220	20	18	40	8	M16	8	4,470
125	R 5"	139,7	188,0	168,0	3,0	210	250	22	18	44	8	M16	8	6,130
150	R 6"	168,3	212,0	195,0	3,0	240	285	22	22	44	10	M20	8	7,920