




ANSI B16.5 150_{LBS} LAP JOINT FF

ANSI lap joint flanges are used in combination with a stub end welded to the pipe. This configuration allows the flange to rotate freely, facilitating bolt-hole alignment during installation.

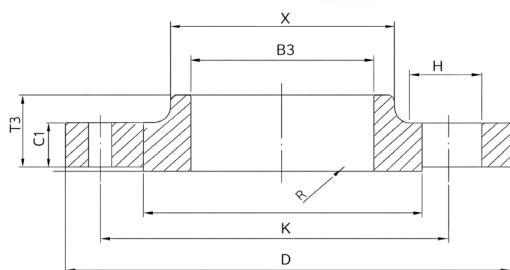

DN	D	C1	R	X	B3	T3	K	Holes	H	Kg
1"	108,00	14,20	3,00	49,00	35,10	18,00	79,20	4	15,90	0,80
1 1/2"	127,00	17,50	6,40	65,00	50,00	22,40	98,60	4	15,70	1,30
2"	152,50	19,00	8,00	78,00	62,50	25,00	120,60	4	19,10	2,00
3"	190,50	23,90	9,70	108,00	91,40	30,20	152,40	4	19,10	3,81
4"	228,60	23,90	11,20	134,90	116,80	33,30	190,50	8	19,10	5,35
6"	279,40	25,40	12,70	192,00	171,50	39,60	241,30	8	22,40	7,76
8"	342,90	28,40	12,70	246,10	222,30	44,50	298,50	8	22,40	12,60
10"	406,40	30,20	12,70	304,80	277,40	49,30	362,00	12	25,40	17,60