




EN 1092-1 TYPE 02 PN10 Loose

Flanges that are not welded directly to the pipe, but are held in position by a stub end or welded ring, allowing flange rotation for easier bolt-hole alignment.

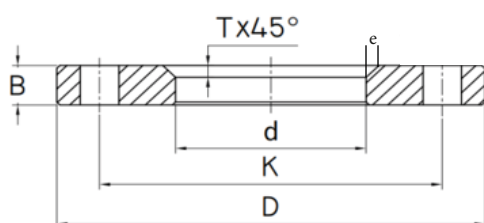

DN	pipe	d	k	D	B	e	thread	n. of drills	kg
200	340	295	24	226	22	6	M20	8	8,947
250	395	350	26	281	22	8	M20	12	11,387
300	445	400	26	333	22	8	M20	12	12,997
350	505	460	30	365	22	8	M20	16	21,032
400	565	515	32	416	26	8	M24	16	26,623
450	615	565	36	467	26	8	M24	20	32,443
500	670	620	38	519	26	8	M24	20	38,777