





UNI 2278 PN16

UNI 2278 PN16 flat flanges are designed for slip-on welding applications and are suitable for industrial systems operating at moderate pressures and temperatures.

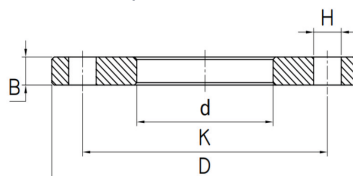

DN	PIPE	d	K	D	B	H	thread	N. of drills	kg
15	21,3	22,0	65	95	12	14	M12	4	0,574
20	26,9	27,5	75	105	14	14	M12	4	0,818
25	33,7	34,0	85	115	14	14	M12	4	0,974
32	42,4	43,0	100	140	16	18	M16	4	1,622
40	48,3	49,0	110	150	16	18	M16	4	1,854
50	60,3	61,5	125	165	18	18	M16	4	2,457
65	76,1	77,0	145	185	18	18	M16	4	2,995
80	88,9	90,0	160	200	20	18	M16	8	3,612
100	114,3	115,5	180	220	22	18	M16	8	4,402
125	139,7	141,0	210	250	24	18	M16	8	5,920
150	168,3	170,0	240	285	24	22	M20	8	7,166
200	219,1	221,0	295	340	26	22	M20	12	9,765
250	273,0	275,0	355	405	32	25	M22	12	15,953
300	323,9	326,0	410	460	32	25	M22	12	19,290
350	355,6	358,0	470	520	36	25	M22	16	29,335
400	406,4	409,0	525	580	38	30	M27	16	36,230
450	457,2	460,2	585	640	40	30	M27	20	44,323
500	508,0	511,0	650	715	42	33	M30	20	59,094
600	609,6	612,6	770	840	44	36	M33	20	82,535
700	711,2	714,2	840	910	46	36	M33	24	81,330
800	812,8	815,8	950	1025	48	39	M36x3	24	103,109
900	914,4	917,4	1050	1125	50	39	M36x3	28	117,518
1000	1016,0	1019,0	1170	1255	50	42	M36x3	28	149,752
1100	1120,0	1124,0	1270	1355	50	42	M39	32	159,048
1200	1220,0	1224,0	1390	1485	52	48	M45	32	202,939
1300	1320,0	1324,0	1490	1585	52	48	M45	32	219,666
1400	1420,0	1424,0	1590	1685	54	48	M45	36	242,418
1600	1620,0	1624,0	1820	1930	56	56	M52	40	331,156