




ANSI B16.5 150_{LBS} WELDING NECK RF XS

ANSI weld neck flanges are designed for high pressure and high temperature applications. Their tapered hub and butt-weld connection provide excellent mechanical strength and optimal stress distribution.

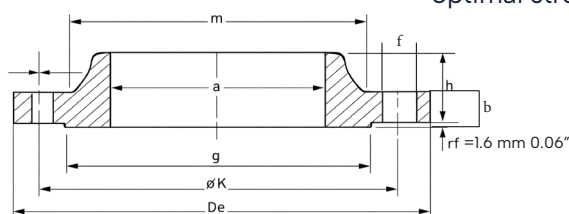

DN	De	b	g	m	j (sch)	h	k	Holes	a	f	Kg
1"	108,00	14,20	50,80	49,30	24,30	55,60	79,20	4	33,5	15,70	1,14
2"	152,40	19,10	91,90	77,70	49,30	63,50	120,70	4	60,5	19,10	2,82
4"	228,60	23,90	157,20	134,90	97,20	76,20	190,50	8	114,3	19,10	7,44
6"	279,40	25,40	215,90	192,00	146,30	88,90	241,30	8	168,4	22,40	11,40